


Codice NATO Costr: / Forn. (N/CAGE): **AD 010**
P:IVA: 01868240464- Iscrizione C.C.I.A.A. Lucca n°177644

Terminazione a 2 uscite

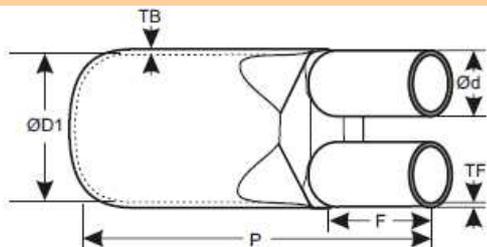

- All dimensions are in mm
- Drawing depicts typical dimensions
- E - as supplied
- S - after free recovery
- D, d - internal diameter without adhesive coating

Dimensioni serie EL2UT

SIZE (P/n.)	D		d		P		F	TB	TF
	E	S	E	S	E	S	E	S	S
	Min.	Max.	Min.	Max.			± 20%	± 20%	± 20%
EL2UT-3010	30	10	12	4	65-68	87-90	15-17	1,5	1,0
EL2UT-5024	50	24	21	7	85-88	118-121	25-27	3,0	2,5
EL2UT-9045	90	45	43	15	165-170	185-195	60-65	2,2	2,2

MATERIAL SPECIFICATIONS

Product Colour - Black

Characteristic	Value	Test Method
Physical Properties		
Density	1.05 ± 0.2 g/cm ³	ASTM D-1505/D=M/V
Hardness	45 ± 3 shore D	ASTM D-2240
Tensile strength	13 N/sqmm (min)	ASTM D-412 /ISO 37
Ultimate elongation	400% (min)	ASTM D-412 /ISO 37
Water absorption	0.15% (max)	ASTM D-570 /ISO 62
Longitudinal Change	10% (max)	-
Longitudinal Shrinkage	≥ 3 : 1	-
Thermal Ageing Tests (120°C for 500hrs)		
Tensile strength	12 N/sqmm (min)	ASTM D-412 /ISO 37
Ultimate elongation	300% (min)	ASTM D-412 /ISO 37
Electrical Properties		
Volume resistivity	1x10 ¹² Ohm-cm (min)	ASTM D-257 /IEC 93
Dielectric strength	10kV/mm (min)	ASTM D-149 /IEC 243
Dielectric constant	5 (max)	ASTM D-150 /IEC 250
Chemical Properties		
Corrosion	None	ASTM D-2671
Resistance to fungus	Rate 1	ISO 846 method A

Pezzo stampato in poliolefina colore nero, termorestringente ad alto spessore, interno rivestito di mastice sigillante adesivo per tenuta a pressione interna, P/n. EL2UT-3010 di misura idonea per essere utilizzato sulla guaina TIPO PVC HGKA – PVC 105 °C per la realizzazione di fruste 2 canali monofase 16A

N.B. misure approssimative, da verificare secondo la reale necessità con il pezzo, disponibili altre misure